



MalcoEdge– 2026 – 04

Release Date 08/20/2026

Revision A

SUBJECT: COLT2 Hose Connector Tree Adjustment

PURPOSE	This document will guide users through the process of adjusting the hose connector tree on the COLT2 18V Cordless Vacuum Pump to provide more space between the oil cap and the hose connector tree. If users are unable to adjust the hose connector tree after performing the adjustment process, please contact customer service at 320-274-7387 or via email at Technical_Services@malcogrp.com .
AFFECTED MODELS	COLT2
TOOLS REQUIRED	• 2mm Hex Key

PROCEDURE


1. Remove the battery from the COLT2 Vacuum Pump.
2. Locate the set screw that holds the hose connector tree in place.
4. Adjust the hose connection tree away from the oil cap. Retighten the set screw to set the new location for the hose connection tree.



NOTICE

The hose connection tree may have taken a set from initial assembly. It may be necessary to leave the set screw slightly loosened to keep the tree from returning to its initial position.

3. Using the 2mm hex key, loosen the set screw.

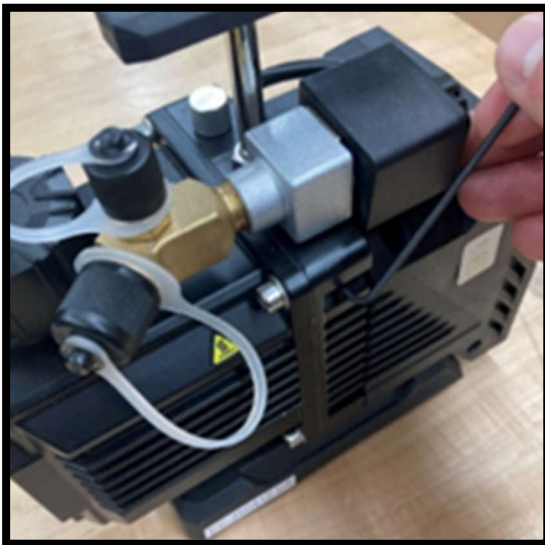

5. The COLT2 18V Cordless Vacuum Pump is ready to use again.

IMPORTANT

Do not remove the set screw.